

Saint-Gobain Seals



Materials

Fluoroloy®	Description	Key features and benefits
	<p>High performance custom formulated compounds and alloys for extreme and specialty sealing applications including PEEK, Fluoropolymers, PTFE/PTFE blends, and UHMWPE</p> <ul style="list-style-type: none"> > Norsok M-710 > NSF > USDA > USP Class VI > FDA compliant grades 	<p>Proprietary and custom formulated compounds developed for:</p> <ul style="list-style-type: none"> > Harsh environments > Cryogenic temperatures > Extreme pressures > Water, steam and hydrocarbon fuel
	<p>High performance/high temperature proprietary fluoropolymer compounds used in bearings, piston rings, tape, cup seals, stock shapes and components</p> <ul style="list-style-type: none"> > NSF > USDA > USP Class VI > FDA compliant grades 	<p>Proprietary and custom fluoropolymer based formulations developed for:</p> <ul style="list-style-type: none"> > Low friction and maintenance > High wear life > Extreme temperature and pressure > Chemical resistance
	<p>High performance/highest temperature materials – including PI, PEEK and PPS – in machined parts, stock shapes or custom molded</p> <ul style="list-style-type: none"> > ASTM D6456-99 > AMS 3644G > MIL-P-46198 	<p>Provides the ultimate in customization and design flexibility:</p> <ul style="list-style-type: none"> > Cryogenic to 600°F (315°C) continuous, intermittently up to 600°F (482°C) > Superior strength and rigidity > Self-lubricating properties


Manufacturing



- > Metal fabrication
- > Hot and cold compression molding
- > Coiling/winding and punching
- > Tool design and fabrication
- > Multi-axis precision machining
- > Direct forming
- > Spring fabrication
- > Class 10K/100 clean rooms
- > Injection and coinjection molding
- > Automatic molding
- > Blending and compounding
- > Etching and bonding
- > Liquid injection molding (LIM)
- > Hot and cold isostatic molding
- > Skiving and sintering
- > Rapid prototyping
- > Micro-injection molding
- > Stamping/drawing and forming
- > Casting and coating
- > Laser marking

Product lines


OmniSeal®



Polymer-based spring energized seals

- > Temperatures: -450 to 600°F (-268 to 316°C)
- > Pressures: vacuum to 50,000 psi (3,448 bar)
- > Broad chemical compatibility
- > Low friction and wear
- > Typically manufactured using Fluoroloy® grades

OmniFlex™



Fluoroelastomer (FKM) seals

- > O-rings and customized parts
- > Temperatures: -70 to 425°F (-57 to 218°C)
- > Soft durometer vs. perfluoroelastomers (FFKM)
- > Low compression set vs. FFKM
- > Superior low temperature performance vs. FFKM and FKM


Bearings



Polymer bearings for withstanding non-lubricated environments

- > Self-lubricating design
- > Low coefficient of friction
- > Temperature resistant
- > Dimensionally stable in fluids
- > Chemically resistant
- > Low weight/high strength ratio
- > Typically manufactured using Rulon® or Meldin® grades


Marathon®



Valve and pump diaphragms

- > Temperatures: -400 to 536°F (-240 to 280°C)
- > Abrasion resistance
- > Broad chemical compatibility
- > Low friction and wear
- > Typically manufactured using Rulon® grades

OmniLip™/DynaLip®



Metal cased lip seals

- > Temperatures: -65 to 450°F (-54 to 232°C)
- > Low friction and low wear in dry abrasive media
- > High speed rotary applications
- > Typically manufactured using Fluoroloy® grades


OmniSpring® / OmniShield®



Springs for latching, locking, electrical contact, EMI and RFI attenuation and shielding

- > Broad selection of designs with four unique spring configurations
- > Standard and custom designs
- > Variety of metals and plating options
- > DC resistance, 0.042 to 27.10 mΩ
- > Shielding 107 to 164 dB (200 MHz) and 96 to 159 dB (1,000 MHz)

Cup Seals



Polymer cup seals for withstanding non-lubricated environments

- > Low friction
- > Air pressure energized
- > Low noise level
- > Long life
- > Low maintenance
- > Low stick slip for smooth operation
- > Typically manufactured using Rulon® grades


Transband®



Endless PTFE rings




- > Reduces surface creep
- > Endless ring, no joints
- > Superior to an epoxy surface that could crack
- > Easy to apply
- > Various shapes and sizes available
- > Typically manufactured using Rulon® grades

Markets and applications

Aerospace 	<ul style="list-style-type: none"> > Jet turbines > Flight actuators > Avionics > Fasteners 		<ul style="list-style-type: none"> > Landing gear > Rocket engines > APU > Radars 	
Life Science 	<ul style="list-style-type: none"> > Bone drills > Surgical instruments > Sensors > Medical devices 		<ul style="list-style-type: none"> > Filtration > HPLC/UPLC > Pharmaceutical > Biotech 	
Electronics 	<ul style="list-style-type: none"> > Telecommunication > Photovoltaic equipment > Semiconductor production > HDD/data storage 		<ul style="list-style-type: none"> > Solenoids > Power generation > Flat panel display production > EMI/RFI shielding 	
Industrial 	<ul style="list-style-type: none"> > Chemical valves > Hydraulic equipment > Printing equipment > Coating and lamination 		<ul style="list-style-type: none"> > Marine equipment > Electrical motors > Pumps > Pneumatic equipment 	
Energy 	<ul style="list-style-type: none"> > Engineered valves > Pumps and compressors > Transfer systems > Turret swivel stacks 		<ul style="list-style-type: none"> > Subsea equipment > E&P equipment > Solar > Wind energy 	
Automotive 	<ul style="list-style-type: none"> > Emission controls > Motorsport/Formula 1 > Seats > Suspension 		<ul style="list-style-type: none"> > Transmission > Powertrain > Brake systems > Steering 	
Habitat 	<ul style="list-style-type: none"> > Anti-seismic > Roadway expansion joints > Highway bridges > Window components 		<ul style="list-style-type: none"> > HVAC systems > Refrigeration > Power tools > Building materials 	
Consumer 	<ul style="list-style-type: none"> > Bicycles > Fitness equipment > Printers > Entertainment 		<ul style="list-style-type: none"> > Water pumps > Kitchen appliances > Washers and dryers > Dishwashers 	

Design engineering

- > Over 250 years of combined seals design experience
- > 3D modeling
- > Finite Element Analysis (FEA)
- > CAD drawings
- > Spring force calculator

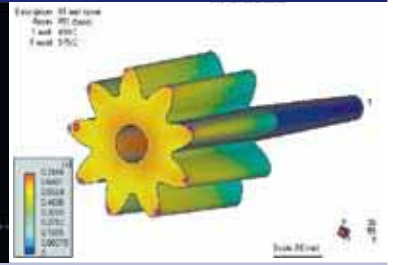

Lab capabilities



- | | | | |
|-----------------------------|---|---|--------------------------|
| R&D | | Quality | |
| > Mechanical testing | > IR and mass spectrometers | > Coordinate Measuring Machine (CMM) | > HPLC |
| > DMA, TMA, TGA, DSC | > EMI/RFI testing | > Optical comparator | > MRB process |
| > Electrical testing | > High pressure hydraulic test chamber | > Wide range of manual and digital torque equipment | > Spring testing |
| > Advanced custom test rigs | > Dimensional stability and limiting oxygen index | > Profilometer | > Clean room environment |
| > Tribological testing | | | > Testing and inspection |
| > Optical testing | | | > Hardness testing |

Quality standards

Garden Grove, CA, USA	DIN EN ISO-9001, DIN EN ISO-14001, AS9100, Class 10K/100 clean rooms	Rioja, Spain	DIN EN ISO-9001:2008, TS-16949:2010
Kontich, Belgium	DIN EN ISO-9001, DIN EN ISO-14001, EN/AS/JISQ 9100	Vinhedo, Brazil	DIN EN ISO-9001:2009, DIN EN ISO-14001:2004
Bristol, RI, USA	DIN EN ISO-9001, DIN EN ISO-14001, TS-16949	Minhang, China	DIN EN ISO-9001:2000, DIN EN ISO-14001:2004, TS-16949:2002, OHSAS-18001:2007, Class 10K/100 clean rooms
Kolo, Poland	DIN EN ISO-9001:2009, DIN EN ISO-14001:2005, PN-N-18011:2004		
Willich, Germany	DIN EN ISO-9001, DIN EN ISO-14001, TS-16949, OHSAS-18001, Class 10K clean room	Suwa, Japan	DIN EN ISO-9001, DIN EN ISO-14001
Saltillo, Mexico	DIN EN ISO-9001:2008, TS-16949*	Shiwa, South Korea	DIN EN ISO-9001, TS-16949, DIN EN ISO-14001:2010*

*In process

For more information please call us, email us at sgpl.marketing@saint-gobain.com, and visit our websites at www.seals.saint-gobain.com and www.rulon-meldin.com



Manufacturing and sales locations

7301 Orangewood Ave. Garden Grove, CA USA Phone: +1 800-544-0080 Fax: +1 714-688-2614	386 Metacom Avenue Bristol, RI USA Phone: +1 401-253-2000 Fax: +1 401-253-1755	Am Nordkanal 37 47877 Willich, Germany Phone: +49 2154-600 Fax: +49 2154-60310	22 Heiveldekens 2550 Kontich, Belgium Phone: +32 34-58-28-28 Fax: +32 34-50-66-01
Industria Aeroespacial 3601 Parque Industrial Saltillo-Ramos Ramos Arizpe, Coah, Mexico Phone: +52 844-866-1200 Fax: +52 800-832-6927	120 Jardim Sao Matheus Vinhedo, Brazil Phone: +55 19-2127-8521 Fax: +55 19-2127-8539	45-46 Avda Ebro Pol El Sequero 26150 Agoncillo, La Rioja, Spain Phone: +34 94-14-86-035 Fax: +34 94-14-37-095	ul.Torunska 239/241 62600 Kolo, Poland Phone: +48 63-26-17-281 Fax: +48 63-27-20-401
1468 Kun Yang Road Minhang Development Zone Shanghai, China Phone: +86 21-5472-1568 Fax: +86 21-5472-2217	1 Ra 212 Shiwa Ind. Cplx. Shiwa, South Korea Phone: + 82 31-432-8200 Fax: + 82 31-432-8206	10801-5, Haramura Suwa, Japan Phone: +81 266-79-6400 Fax: +81 266-70-1001	

Sales only locations

Grindwell Norton Ltd. Bangalore, India Phone: +91 80-3097-8888/2847-2900 Fax: +91 80-3097-8582	V.le Colleoni 3 Palazzo Taurus 2 20041 Agrate Brianza (MI), Italy Phone: +39 039-6578904 Fax: +39 039-652736	Saint-Gobain Advanced Materials Taipei, Taiwan Phone: +886 225-034-201 Fax: +886 225-034-202	Saint-Gobain Sekurit Rayong, Thailand Phone: +66 38-667800 Fax: +66 38-667892
---	--	---	--

R&D centers

7301 Orangewood Ave. Garden Grove, CA USA Phone: +1 800-544-0080 Fax: +1 714-688-2614	386 Metacom Avenue Bristol, RI USA Phone: +1 401-253-2000 Fax: +1 401-253-1755	Am Nordkanal 37 47877 Willich, Germany Phone: +49 2154-600 Fax: +49 2154-60310	22 Heiveldekens 2550 Kontich, Belgium Phone: +32 34-58-28-28 Fax: +32 34-58-26-69
9 Goddard Road Northborough, MA USA Phone: +1 508-351-7600 Fax: +1 508-351-7700	1468 Kun Yang Road Minhang Development Zone Shanghai, China Phone: +86 21-5472-1568 Fax: +86 21-5472-2217		

OmniFlex™ and OmniLip™ are trademarks of Saint-Gobain Performance Plastics Corporation. DynaLip®, Fluoroloy®, Marathon®, Meldin®, OmniSeal®, OmniShield®, OmniSpring®, Transband® and Rulon® are registered trademarks of Saint-Gobain Performance Plastics Corporation.

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.

©2010 Saint-Gobain Performance Plastics Corporation
BST-4172-10K-1110-SGCS

